




度亘光电科技（南通）有限公司

光纤耦合半导体激光模块

FIBER COUPLED DIODE LASER MODULE

850W 976nm 300/330μm 产品

PN: DG-Z28-850-976-300

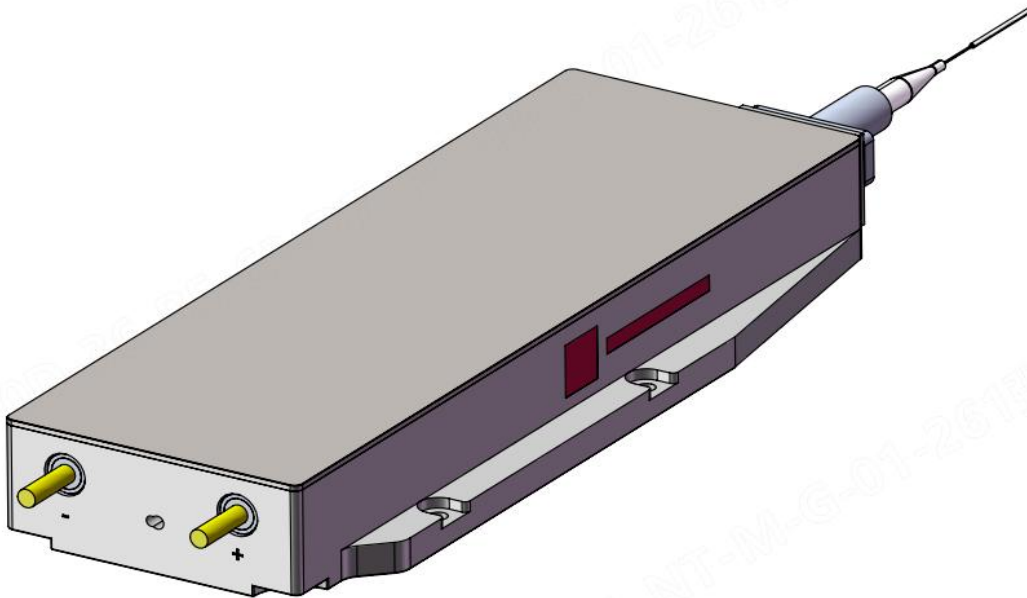


| 版本号 | 新编/修订内容 | 修订日期       |
|-----|---------|------------|
| A0  | 新编      | 2026.03.26 |
|     |         |            |

| <b>主要特性 Key Features:</b> <ul style="list-style-type: none"> <li>● 高亮度/ High Brightness</li> <li>● 高电光转换效率/ High E-O Conversion</li> <li>● 高可靠性/ High Reliability</li> </ul> |          | <b>应用领域 Application:</b> <ul style="list-style-type: none"> <li>● 光纤激光泵浦/Fiber Laser Pump</li> </ul> |              |          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------------------------|--------------|----------|
| 光学参数 <sup>1</sup> / Optical Parameters <sup>1</sup>                                                                                                                          | 单位/ Unit | 最小值/ Min                                                                                             | 典型值/ Typical | 最大值/ Max |
| 连续输出功率@40A/ CW Output Power @40A                                                                                                                                             | W        | 850                                                                                                  | 900          |          |
| 中心波长 <sup>2</sup> / Central Wavelength <sup>2</sup>                                                                                                                          | nm       | 976±3                                                                                                |              |          |
| 光谱宽度/ Spectral Width (FWHM)                                                                                                                                                  | nm       |                                                                                                      | 4            | 6        |
| 数值孔径@95%功率/ NA @ 95% Power                                                                                                                                                   | -        |                                                                                                      | 0.18         |          |
| 锁波电流范围/ Locked Current                                                                                                                                                       | A        | -                                                                                                    |              |          |
| 光纤芯径/Fiber Core Diameter                                                                                                                                                     | μm       | 300                                                                                                  |              |          |
| 光纤包层/ Fiber Cladding Diameter                                                                                                                                                | μm       | 330                                                                                                  |              |          |
| 光纤数值孔径 /Fiber NA                                                                                                                                                             | -        | 0.22                                                                                                 |              |          |
| 光纤盘绕直径/ Optical fiber winding diameter                                                                                                                                       | cm       | ≥12                                                                                                  |              |          |
| 光纤长度/ Fiber Length                                                                                                                                                           | m        | 1.5                                                                                                  | 2.0          |          |
| 光纤输出头/ Fiber Connector                                                                                                                                                       | -        | FC                                                                                                   |              |          |
| 防反射波段/ Back Reflection Isolation Wavelength                                                                                                                                  | nm       | 1040                                                                                                 |              | 1200     |
| 防反射隔离度/ Back Reflection Isolation                                                                                                                                            | dB       |                                                                                                      | 30           |          |
| 电学性能/ Electrical Parameters                                                                                                                                                  |          | 最小值/ Min                                                                                             | 典型值/ Typical | 最大值/ Max |
| 电光转换效率/ Conversion Efficiency                                                                                                                                                | %        |                                                                                                      | 53           |          |
| 阈值电流/ Threshold Current                                                                                                                                                      | A        |                                                                                                      | 1.55         |          |
| 工作电流 <sup>3</sup> / Operating Current <sup>3</sup>                                                                                                                           | A        |                                                                                                      | 38           | 40       |
| 工作电压/ Operating Voltage                                                                                                                                                      | V        | 41.5                                                                                                 | 43           | 44.5     |
| 热学性能/ Thermal Parameters                                                                                                                                                     |          | 参考值/ Reference value                                                                                 |              |          |
| 工作温度 <sup>4</sup> / Operating Temperature Range <sup>4</sup>                                                                                                                 | ℃        | 0 to 50(管壳温度)                                                                                        |              |          |
| 存储温度/ Storage Temperature Range                                                                                                                                              | ℃        | -40 to 85                                                                                            |              |          |
| 光纤温度/Fiber Temperature Range                                                                                                                                                 | ℃        | ≤40                                                                                                  |              |          |
| 壳体温度/Package Housing Temperature Range                                                                                                                                       | ℃        | ≤45                                                                                                  |              |          |
| 管嘴温度/Boot Temperature Range                                                                                                                                                  | ℃        | ≤45                                                                                                  |              |          |
| 盖板温度/Lid cover Temperature Range                                                                                                                                             | ℃        | ≤50                                                                                                  |              |          |
| 温漂系数/ Wavelength Temperature Coefficient                                                                                                                                     | nm/℃     | 0.35                                                                                                 |              |          |
| 其他参数/Other parameters                                                                                                                                                        |          | 最小值/ Min                                                                                             | 典型值/ Typical | 最大值/ Max |
| 重量/ Weight                                                                                                                                                                   | Kg       |                                                                                                      | 1.4          |          |
| 焊接温度/ Soldering Temperature                                                                                                                                                  | ℃        |                                                                                                      |              | 350      |
| 焊接时间/ Welding Time                                                                                                                                                           | Sec      |                                                                                                      |              | 10       |

- 1 在水冷 25 摄氏度下测得; Tested at 25°C water-cooled heat sink;
- 2 可根据客户需求定制; Others available upon request;
- 3 超规格使用会导致激光器寿命下降; Reduced lifetime if used above nominal operating condition;
- 4 激光波长会随热沉工作温度变化产生漂移。Laser wavelength would shift when heat sink operating temperature is changed.

## 外形尺寸/ Dimensions (mm)

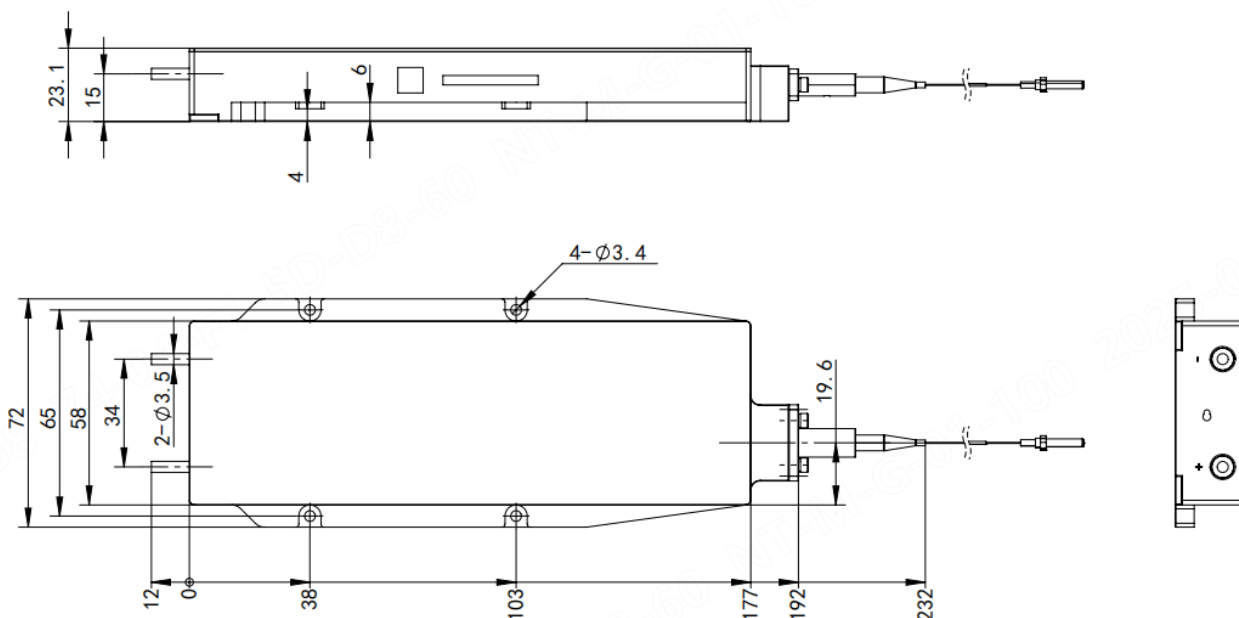

## 使用说明 Application Notes:

- 输出激光是不可见光, 使用时须遵守 IEC 四级激光标准安全规范, 避免激光直接或间接照射眼睛;  
The laser beam is invisible, please follow the standard safety procedures for IEC Class 4 lasers, avoid eyes exposure to radiation;
- 静电击穿导致半导体激光器失效, 激光器安装人员须经过培训, 操作时须佩戴防静电手腕带, 工作台需接地。在供电接头与激光器连接前, 正负极应处于短接状态;  
ESD cause diode laser failure, The operator should be trained, wearing ESD grounding straps and the work surface should be grounded. The positive and negative poles shall be connected before the power supply is connected with the laser;
- 电流过冲可能损坏激光器, 驱动电源须稳定无过冲。  
The current overshoot may damage the laser, and the driving power must be stable without overshoot.

